Universal




- · Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow lift lug for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- · Lift beam, spreader beam, fork lift beam
- A true universal beam
- Shackles, hooks, mast tie off and top rigging by others

- Made in U.S.A.
- · Custom sizes available
- · Custom designs available call for engineering.
- ALL lifting equipment individually proof loaded per OSHA requirements.
- · All dimensions in inches unless otherwise noted.



Prop 65 – See Page 112

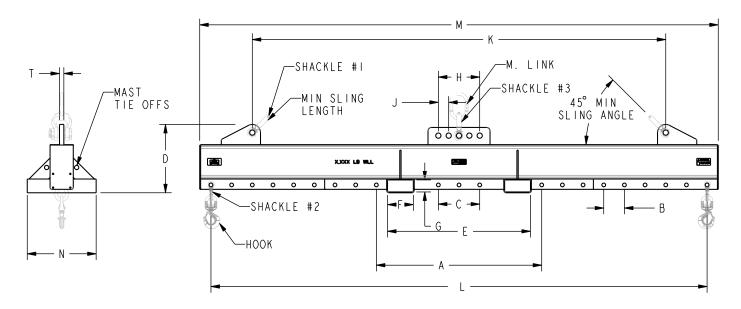

Part Number	Capacity in Pounds	L = Length	A	В	С	D	E*	F*	G*	Н	J	К	М	N	Т	Weight	Shackle #1 Size	Shackle #2 Size	Shackle #3 Size	M. Link Size	Hook Size	Min Sling Length
24662	6,000	144	48	6	12	15.7	41.5	7.5	3.5	12	3	120	150.5	20	1	535	3/4''	5/8"	3/4"	3/4''	2t	82"
24663	10,000	144	48	6	12	20	41.5	7.5	3.5	12	3	120	150.5	20	1.25	868	1 1/4"	7/8′′	1 1/4"	7/8′′	5t	82"
24664	15,000	144	48	6	12	20	41.5	7.5	3.5	12	3	120	150.5	20	1.25	1115	1 1/4"	7/8′′	1 1/4"	1"	5t	82''
24665	20,000	144	48	6	12	21.9	41.5	7.5	3.5	12	3	120	150.5	20	1.25	1120	11/4"	7/8''	11/4"	1"	5t	82''

^{*} See Fork Lift Attachment Rules OSHA 1910.178

OPTIONAL MAST TIE OFF CHAIN

Part Number	
20410	Mast Tie Off Chain — 8' Long

