


WIRE ROPE TERMINATIONS

Wire Rope Ferrules

1/2" to 1-1/2" Wire Rope Diameter

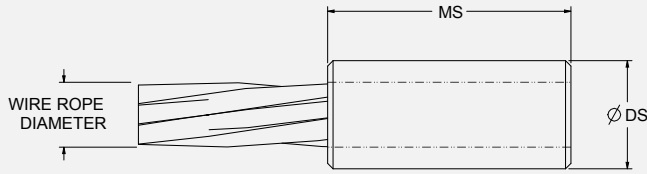

Mild carbon or stainless steel. Recommended for use on 6X19, 6X37 or 7X19 IWRC wire rope constructions only. Not intended to hold the breaking strength of the wire rope - a destructive test is recommended before use. Ends chamfered to help assembly. WHEN ORDERING: replace '-X' in part number with "M" for mild carbon steel or "S" for stainless steel material.

Prop 65 – See Page 112

Part Number*	Wire Rope Diameter	DS After Swage Dim Min	DS After Swage Dim	DS After Swage Dim Max	MS (approx)	Weight Each
WR-10438-X	1/2"	0.98	1.00	1.03	2.00	0.34
WR-10439-X	1/2"	0.98	1.00	1.02	1.75	0.33
WR-10440-X	1/2"	1.105	1.125	1.16	2.00	0.50
WR-10441-X	1/2"	1.23	1.25	1.27	1.25	0.40
WR-10442-X	1/2"	1.23	1.25	1.27	1.75	0.57
WR-10443-X	1/2"	1.105	1.125	1.16	2.19	0.59
WR-10444-X	1/2"	1.105	1.125	1.16	2.375	0.59
WR-10445-X	9/16"	1.04	1.063	1.09	2.438	0.52
WR-10446-X	9/16"	1.105	1.125	1.16	1.50	0.34
WR-10447-X	9/16"	1.23	1.25	1.29	2.438	0.74
WR-10448-X	9/16"	1.23	1.25	1.29	2.625	0.80
WR-10449-X	5/8"	1.23	1.25	1.29	2.75	0.79
WR-10450-X	5/8"	1.355	1.375	1.42	2.50	0.93
WR-10451-X	5/8"	1.355	1.375	1.42	2.875	1.06
WR-10452-X	3/4"	1.48	1.50	1.55	3.25	1.35
WR-10453-X	3/4"	1.48	1.50	1.55	2.00	0.93
WR-10454-X	3/4"	1.48	1.50	1.55	3.50	1.46
WR-10455-X	7/8"	1.73	1.75	1.80	3.875	2.18
WR-10456-X	7/8"	1.73	1.75	1.80	2.50	1.50
WR-10457-X	7/8"	1.73	1.75	1.80	2.79	1.61
WR-10458-X	7/8"	1.73	1.75	1.80	3.00	1.74
WR-10459-X	7/8"	1.73	1.75	1.80	4.125	2.32
WR-10460-X	1"	1.98	2.00	2.05	4.36	3.23
WR-10461-X	1"	1.98	2.00	2.05	4.75	3.53
WR-10462-X	1-1/8"	2.22	2.25	2.30	5.00	4.60
WR-10463-X	1-1/8"	2.22	2.25	2.30	4.81	4.60
WR-10464-X	1-1/8"	2.22	2.25	2.30	5.25	5.00
WR-10465-X	1-1/4"	2.47	2.50	2.56	5.50	6.27
WR-10466-X	1-1/4"	2.47	2.50	2.56	5.875	6.79
WR-10467-X	1-3/8"	2.72	2.75	2.81	6.00	8.46
WR-10468-X	1-3/8"	2.72	2.75	2.81	6.50	9.24
WR-10469-X	1-1/2"	2.97	3.00	3.06	6.50	10.98
WR-10470-X	1-1/2"	2.97	3.00	3.06	7.125	11.97

* Call for specifications on different sizes or material

CAUTION: It is recommended that the assembly with the swaged wire rope termination be proof loaded to prove the adequacy of the assembly.