
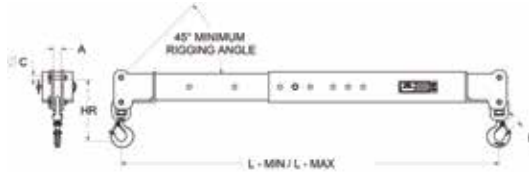


- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Spreader Beams shipped with proof load certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Standard with swivel latch hooks. Top rigging not included - please call for pricing
- Made in U.S.A.
- Custom designs available - call for engineering.

- Minimum horizontal top rigging angle of 45°.
- Ideally suited for adding stability to critical lifts.

 Prop 65 – See Page 112



TELESCOPING ADJUSTABLE SPREADER BEAMS							
Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*					A (in) C (in) E (in)
		Min Max 4 - 6	Min Max 6 - 10	Min Max 8 - 14	Min Max 12 - 20	Min Max 21 - 30	
4,000	Part Number	12805	12822	12813	12829	24455	1.00
	HR =	5.37	5.12	5.12	5.12	8.87	0.50
	LBS =	80	120	155	235	585	0.89
10,000	Part Number	12834	12842	12848	12853	24454	1.25
	HR =	6.53	6.28	6.28	6.28	11.0	0.75
	LBS =	130	190	250	365	802	1.08
20,000	Part Number	12864	12872	12880	12885	24453	1.66
	HR =	7.63	7.63	7.63	7.63	13.0	1.00
	LBS =	185	265	345	510	1160	1.31

OPTIONAL TOP RIGGING						
Working Load Limit in Pounds*	Part Name	Part Number	Part Number	Part Number	Part Number	Part Number
4,000	Adjustable Spreader	12805	12822	12813	12829	24455
	Chain	23354	23355	23356	23357	24456
	Wire Rope	23396	23397	23398	23399	24462
	Round Sling Bridle	23374	23375	23376	23377	24459
10,000	Adjustable Spreader	12834	12842	12848	12853	24454
	Chain	23378	23379	23380	23381	24457
	Wire Rope	23400	23401	23402	23403	24463
	Round Sling Bridle	23382	23383	23384	23385	24460
20,000	Adjustable Spreader	12864	12872	12880	12885	24453
	Chain	23386	23387	23388	23389	24458
	Wire Rope	23404	23405	23406	23407	24464
	Round Sling Bridle	23390	23391	23392	23393	24461

*Minimum horizontal top rigging angle is 45° on all fixed and adjustable spreaders. M&W recommends a minimum horizontal top rigging angle of 60°. Adjustable on 1" increments.