


LIFTING HOOKS

Alloy Steel Sorting Hooks

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Corrosion resistant finish.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- $\pm 4\%$ on dimensions.
- Custom designs available - call for engineering.
- All eyes welded unless otherwise specified.
- **Maximum use temperature is 400° F.**
- Handle not designed for lifting.

 Prop 65 – See Page 112

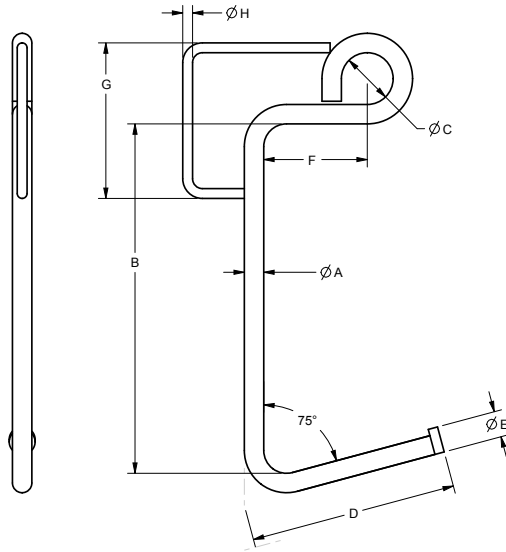

Material ØA in Inches*	Part Number	Standard Alloy Steel Sorting Hooks						Weight	Working Load Limit in Pounds*
		B	C	D	E	F	G		
1/2	13457	3.25	1.50	4.00	0.75	1.88	4.00	1.0	100
3/4	13425	13.50	2.00	8.00	1.00	4.00	6.00	4.5	300
7/8	13424	13.50	2.00	8.00	1.00	3.88	6.00	6.0	450

*Larger capacities and custom configurations available. Please call for ordering assistance.